



WinterWarm  
Wood Fireplace Inserts



Go state-of-the-art  
warm with WinterWarm.

# WinterWarm Wood Fireplace Inserts



## The WinterWarm System. Easy. Efficient. Perfect.

The WinterWarm Fireplace Insert slips easily into your existing fireplace to instantly transform it into an efficient heat source. You'll enjoy all of the beauty of an open fireplace, with all of the convenience and performance of a state-of-the-art wood stove. Two sizes are available to suit a wide range of fireplace and room sizes.



WinterWarm Small Insert

## WinterWarm Small Inserts

### Standard Features

- High Efficiency - more heat from less wood - 74%
- Large fireviewing area with clean, durable, ceramic glass
- Easy ash pan handling
- High heat output of 30,000 BTUs/hr
- Adjustable front for recessed or flush installation
- Rheostat controlled twin fans
- Solid durable cast iron construction
- Long overnight burn times
- Conveniently located, front mounted controls
- Thermostatic control for steady, even heat

### Options

- Available in Classic Black, plus two porcelain enamel color choices: Sand and Ebony Black
- Porcelain colors are on the insert firebox only - all surrounds are Classic Black
- Cast iron or steel surround panels in Classic Black color only
- Outside air adaptors




WinterWarm Fireplace System

## WinterWarm Fireplace System

The WinterWarm System allows you to add the elegance of a fireplace almost anywhere in your home. The system includes everything you need – Large WinterWarm insert, the zero clearance cabinet and gravity vent ducts. It's beautiful. Functional. And it's only by Vermont Castings®.

### Standard Features

- High Efficiency - 78% - more heat from less wood
- Large fireviewing area with clean, durable, ceramic glass
- Easy swing-out ash pan with cover
- High heat output - up to 50,000 BTU/hr
- Rheostat controlled twin fans for heat circulation
- Very low smoke emissions - 2.1 grams/hr
- Standard sparkscreen for open fireviewing
- Solid, durable cast iron construction
- Long overnight burn times
- Solid brass trim around door
- Conveniently located controls
- Thermostatic control for steady, even heat

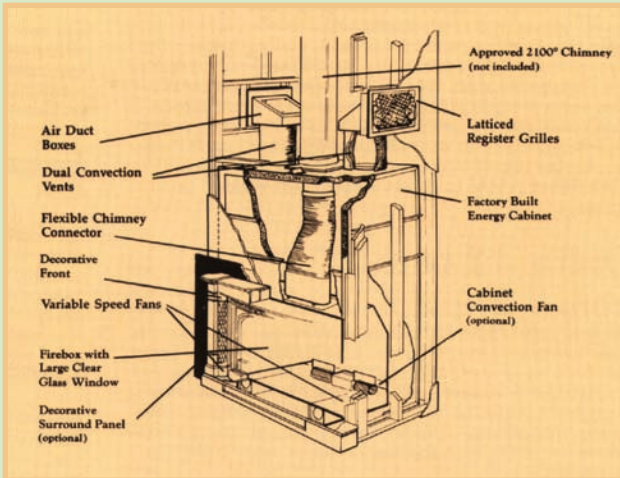

### Options

- Available in Classic Black, plus two porcelain enamel color choices for the Traditional Front: Sand and Ebony Black
- Porcelain colors are on the Traditional Front only - all Fireboxes are Classic Black



WinterWarm Large Insert

## WinterWarm Large Inserts

### Standard Features

- High Efficiency - more heat from less wood - 78.3%
- Large fireviewing area with clean, durable, ceramic glass
- Easy ash pan handling
- High heat output of 50,000 BTUs/hr
- Rheostat controlled twin fans
- Standard sparkscreen for open fireviewing
- Solid durable cast iron construction
- Long overnight burn times
- Conveniently located, front mounted controls
- Thermostatic control for steady, even heat

### Options


- Available in Classic Black, plus two porcelain enamel color choices for the Traditional Front: Sand and Ebony Black
- Porcelain colors are on the Traditional Front only - all Fireboxes are Classic Black
- Outside air adaptors
- Steel surround panels available for larger opening in Classic Black only
- Vent starters and adaptors

# WinterWarm Wood Fireplace Inserts


## Models • Small • Large • Fireplace System




### WINTERWARM SMALL INSERT

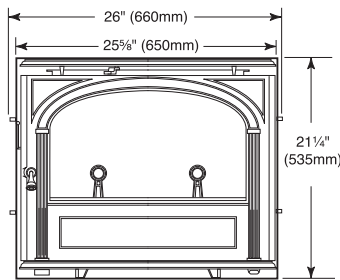

FRONT VIEW

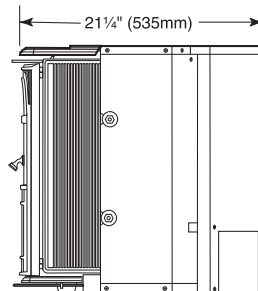

SIDE VIEW

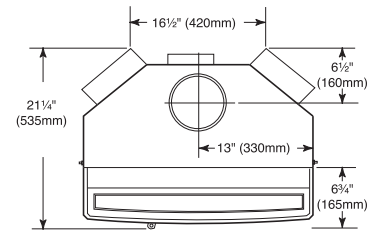

TOP VIEW


**Specifications:** Small Model  
 Log Length: 18"  
 Burn Time: 6 - 8 hours  
 Heating Capacity: 500 - 1,000 sq. ft.  
 Maximum Heat Output: 30,000 BTU/hr  
 Efficiency Rating: 74%  
 EPA Emissions Rating: 2.1 grams/hr  
 Weight: 285lbs

**Minimum Fireplace Dimensions:**  
 Height: 21 1/2"  
 Width: 26 1/2"  
 Depth: 15"


**Flue Collar Size:** 6" round

**Optional Surround Packages:**  
 6" steel covers: 36 1/2"w x 27"h  
 10" steel cover: 44 1/2"w x 3"h  
 7" Cast covers: 40"w x 28 1/2"h  
 10" Cast covers: 45"w x 31"h

### WINTERWARM LARGE INSERT

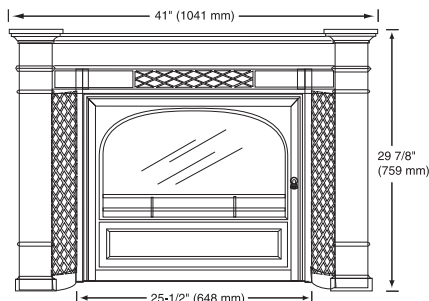

FRONT VIEW

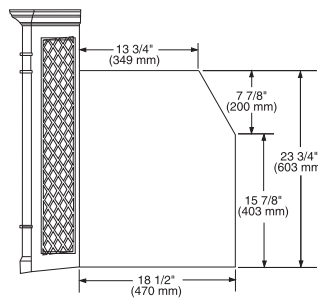

SIDE VIEW

**Specifications:** Large Model  
 Log Length: 24"  
 Burn Time: Up to 9 hours  
 Heating Capacity: 750 - 1,500 sq. ft.  
 Maximum Heat Output: 50,000 BTU/hr  
 Efficiency Rating: 78.3%  
 EPA Emissions Rating: 2.1 grams/hr  
 Weight: 475lbs

**Minimum Fireplace Dimensions:**  
 Height: 24"  
 Width: 34"  
 Depth: 19"

**Flue Collar Size:** 8" oval  
 Optional Surround covers up to 51"w x 36"h

### WINTERWARM FIREPLACE SYSTEM - Specifications: Fireplace System Model. (Specifications same as WinterWarm Large)

Log Length: 24"  
 Burn Time: Up to 9 hr  
 Heating Capacity: 750 - 1,500 sq. ft.  
 Maximum Heat Output: 50,000 BTU/hr  
 Clearances of Cabinet: To Wall Studs: 1/2"

Efficiency Rating: 78.3%  
 EPA Emissions Rating: 2.1 grams/hr  
 Weight: 840lbs  
 Chimney: 8" High Temperature

**Cabinet Dimensions:**  
 Height: 59 1/2"  
 Width: 39 1/2"  
 Depth: 28 1/2"  
 Visible Front: 41"w x 34 1/2"h



ph: 1.800.525.1898  
[www.vermontcastings.com](http://www.vermontcastings.com)  
[www.majesticproducts.com](http://www.majesticproducts.com)

YOUR DEALER



DutchWest  
Plate Steel Wood Stoves and Insert



Warmth. Quality. And  
Famous Dutchwest Value

# Dutchwest Wood



Wood Stoves Built to Warm and Built to Last. At Dutchwest, we design every one of our wood stoves to deliver superior performance, durability, and value.

## Premium Steel-Cast Stoves

Style and performance – heavy 5/16" thick top; firebrick firebox lining, cast-iron door, air hood, ash lip, and base elements. Three sizes with your choice of legs or pedestal. All Cast-Steel models include convenient ash drawer. All cast iron components are made in our Vermont foundry. Brushed Nickel handle to match today's interior finishes. Convective side panels reduce side clearances.

### Three Sizes:

- Small (1,000 sq. ft):
  - Leg DW1000L02; Pedestal DW1000P02
- Medium (1,500 sq. ft):
  - Leg DW1500L02; Pedestal DW1500P02
- Large (2,000 sq. ft)
  - Leg DW2000L02; Pedestal DW2000P02



DW1500P02  
Contoured Pedestal Base

DW1500L02  
Cast Iron Legs

### Wood Insert Model DW2500X02 - The Perfect Solution to an Inefficient Masonry Fireplace.

Crafted with the same sturdy construction as our wood stoves, the Dutchwest masonry wood insert is designed for existing masonry fireplaces. Standard features include a brick-lined firebox, blower, and faceplate (44 1/8" W x 31" H) with nickel trim.

Heating capacity up to 1,500 sq. ft.



Wood Insert DW2500X02

# Stoves & Insert

GREEN-BURN non-catalytic combustion technology results in low exhaust emissions for clean air. More complete combustion means more heat for less wood and longer lasting fires.

## Value Line of Steel Stoves

Durable and feature rich at a value price. Stylish rolled top adds durability without adding unnecessary bulk – 3/16" thick top has strength of 5/16" flat top. Cast iron doors provides a large ceramic glass viewing area. Air wash design helps maintain a clean glass. Firebrick firebox lining.



**Mobile Home Approved Wood Stove  
Model CDW247001**

- Heating capacity up to 1,000 sq. ft.
- HUD approved for use in mobile homes; outside air connection
- Reduced clearance convection side panels



**Small Steel Wood Stove  
Model CDW244**

- Heating capacity up to 1,000 sq. ft.
- Features cast iron door with steel legs



**Medium Steel Wood Stove  
Model CDW270007**

- Heating capacity up to 1,500 sq. ft.
- Features pedestal base with ash drawer



**Large Steel Wood Stove  
Model CDW300007**

- Heating capacity up to 2,000 sq. ft.
- Features pedestal base with ash drawer

# Dutchwest Plate Steel Wood Stoves and Insert



Model	CDW247001 Mobile Home Approved	CDW244	CDW270007	CDW300007	DW1000P02 (pedestal)	DW1000L02 (legs)	DW1500P02 (pedestal)	DW1500L02 (legs)	DW2000P02 (pedestal)	DW2000L02 (legs)	
Heat Cap. Sq. ft.*	up to 1,000	up to 1,000	up to 1,500	up to 2,000	up to 1,000	up to 1,000	up to 1,500	up to 1,500	up to 2,000	up to 2,000	
Heat Output BTU/hr.	19,000	26,100	29,300	32,300	26,100	26,100	29,300	29,300	32,300	32,300	
Avg. Efficiency %	65.3	74.5	63.0	63.0	74.5	74.5	63.0	63.0	63.0	63.0%	
Avg. Emissions g/hr.	5.0	5.3	4.4	2.7	5.3	5.3	4.4	4.4	2.7	2.7	
Firebox Vol. cu. ft.	1.7	1.3	2.0	2.9	1.3	1.3	2.0	2.0	2.8	2.8	
Log Length	18"	18"	22"	20"	18"	18"	22"	22"	20"	20"	
Product Wt. lbs.	180	180	310	300	222	222	385	350	350	350	
Shipping Wt. lbs.	210	210	330	320	270	270	395	380	385	385	
Over-all Dims.	31 3/4" h 22 3/4" w 20 3/8" d	26 15/16" h 22 1/2" w 20 5/8" d	29 9/16" h 27" w 20 7/8" d	31 1/2" h 26 1/2" w 25 1/8" d	27" h 23 3/4" w 20 1/2" d	27" h 23 3/4" w 20 1/2" d	30" h 28 1/4" w 22 1/4" d	30" h 28 1/4" w 22 1/4" d	31" h 26 1/2" w 26" d	31" h 26 1/2" w 26" d	
Ash Drawer	NO	NO	YES	YES	YES	YES	YES	YES	YES	YES	
Clearances to Combustibles	Top	54"	56"	54 1/2"	54"	56"	54 1/2"	54 1/2"	54"	54"	
	Rear Sides Corner	10 1/2" 10 1/2" 10 1/2"	15" 18" 7"	13" 17 1/2" 11"	14" 18 1/2" 11"	12 1/2" 12" 7"	12 1/2" 12" 7"	9" 11 1/2" 7"	9" 11 1/2" 7"	10" 15" 9"	10" 15" 9"
	Rear Sides Corner	5" 2 1/2" 2 1/2"	N/A N/A N/A	N/A N/A N/A	N/A N/A N/A	8" 8 1/2" 5 1/2"	8" 8 1/2" 5 1/2"	6" 6" 4"	6" 6" 4"	10" 14" 8"	10" 14" 8"
	Double Single Wall Wall Pipe										



DW2500X02

Heat Cap. Sq. ft.*	Heat Output BTU/hr.	Avg. Efficiency %	Avg. Emissions g/hr	Firebox Vol. cu. ft.	Log Length	Product Wt. lbs.	Insert Dim.	Min. Fireplace Opening
Up to 1,500	58,000	64%	4.7	1.3	20"	250	21 3/4" H 26 3/4" W 20 3/4" D	23 3/4" H 30 3/4" W 10" D Faceplate: 31" H x 44" W

See owners manual for complete dimensions and installation specifications. Units require 6" diameter flue connector.  
\*Note: Actual heating area will vary based on fuel, home construction and region.



ph: 1.800.525.1898  
www.vermontcastings.com  
www.majesticproducts.com

YOUR DEALER